


PRESTO





Simplified **INSTALLATION** **GUIDE**

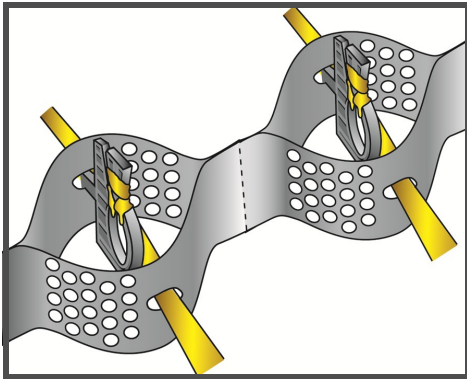

GEOWEB® SLOPE PROTECTION SYSTEM TENDONS & ATRA® TENDON CLIPS

**For detailed installation guidelines,
see www.prestogeo.com/installation**

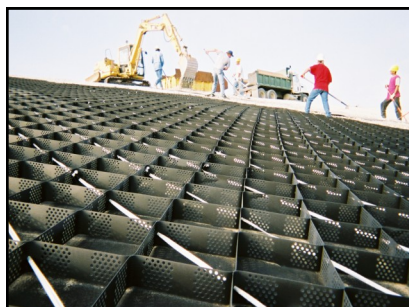

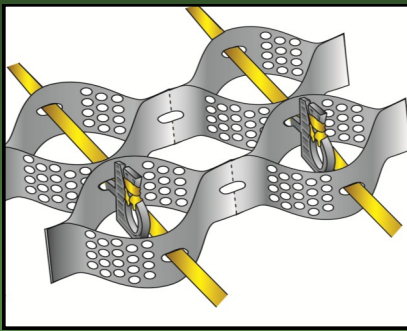


TENDONS AND ATRA® TENDON CLIPS


GEOWEB®

SLOPE PROTECTION SYSTEM


- 1.** Prepare subgrade. Remove debris, rocks.

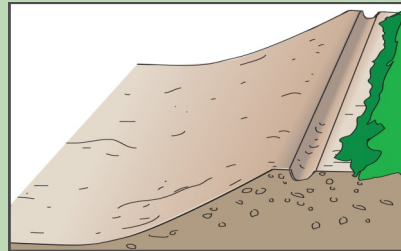


- 2.** Install geotextile.
(if required)

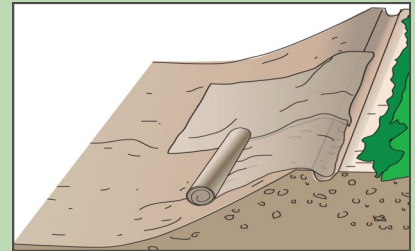


- 3.** Thread tendons through cell wall slots per design.

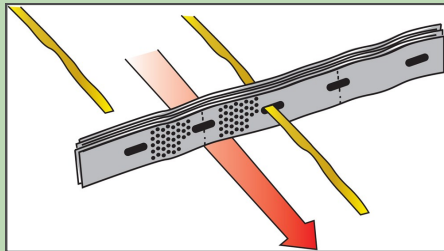


- 4.** Secure tendoned Geoweb sections at the top of the slope with *specified anchor system*. See Options **A**, **B**, **C**.

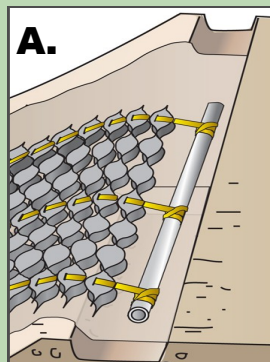

"Deadman" Pipe

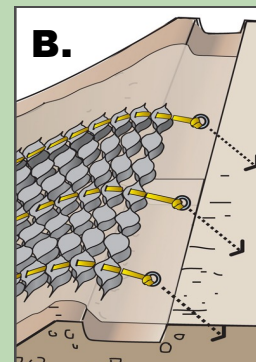


Earth anchors

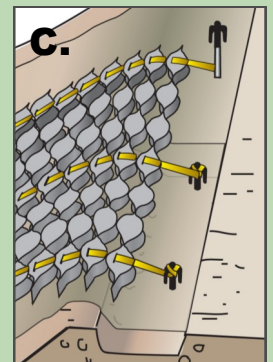

ATRA Anchors

- 5.** Install ATRA Tendon Clips per design.

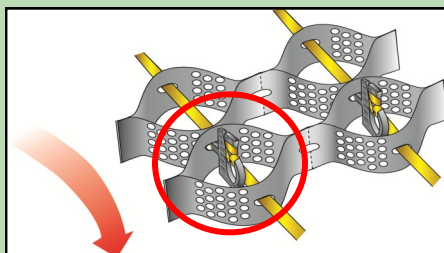

TIP:

Install at top of slope with Geoweb sections partially expanded several sections at a time.

- 5A.** Wrap tendon with ATRA Tendon Clips as shown.



1




2



3



4



5

Simplified INSTALLATION GUIDE

TENDONS & ATRA® TENDON CLIPS


IMPORTANT NOTE:

The simplified installation guide provided by Presto Geosystems is intended as a **general guideline only**. The contractor should follow contract plans and specifications and refer to detailed installation guidelines (see www.prestogeo.com/installation) for more information.


- 6.** Expand Geoweb sections down the slope.






- 7.** Connect Geoweb sections with ATRA keys.
Connect side to side (A) and end to end (B).

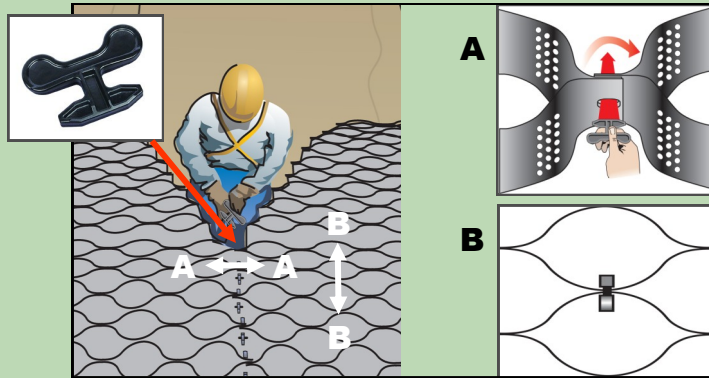


- 8.** Anchor the bottom (toe) of the slope.

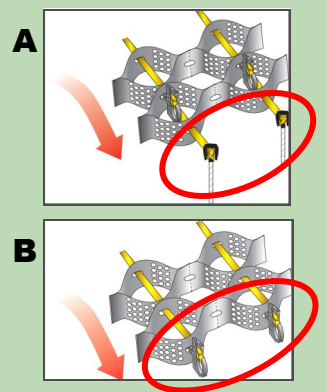


- 9.** Place Infill from the top of the slope. Use equipment suitable for infill placement.




- A.** Topsoil & Erosion Control Blanket.

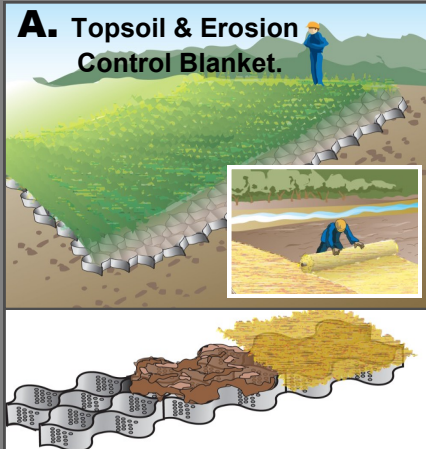


- B.** Aggregate

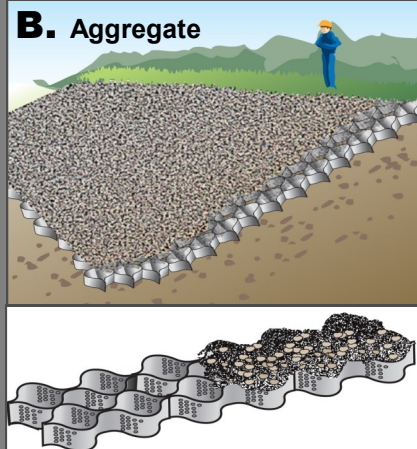

- C.** Concrete

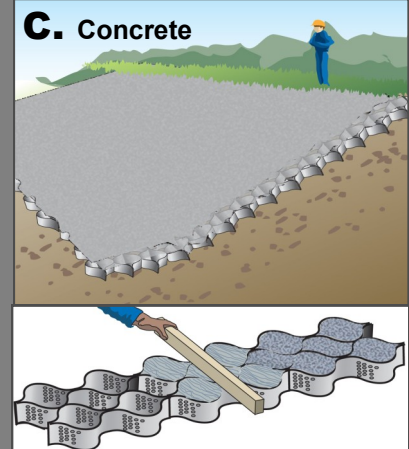

Material List

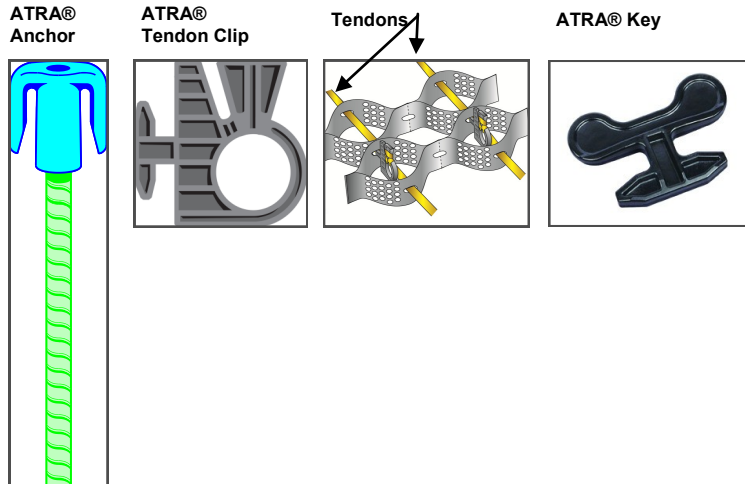

Limited Warranty

Presto Geosystems warrants each Geoweb® section which it ships to be free from defects in materials and workmanship at the time of manufacture. Presto's exclusive liability under this warranty or otherwise will be to furnish without charge to Presto's customer at the original f.o.b. point a replacement for any section which proves to be defective under normal use and service during the 10-year period which begins on the date of shipment by Presto. Presto reserves the right to inspect any allegedly defective section in order to verify the defect and ascertain its cause.

This warranty does not cover defects attributable to causes or occurrences beyond Presto's control and unrelated to the manufacturing process, including, but not limited to, abuse, misuse, mishandling, neglect, improper storage, improper installation, improper alteration or improper application.

PRESTO MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, WRITTEN OR ORAL, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTIES OR MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, IN CONNECTION WITH THE GEOWEB® SYSTEM. IN NO EVENT SHALL PRESTO BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR THE BREACH OF ANY EXPRESS OR IMPLIED WARRANTY OR FOR ANY OTHER REASON, INCLUDING NEGLIGENCE, IN CONNECTION WITH THE GEOWEB® SYSTEM.

Geosystems®, Geoweb®, and ATRA® are registered trademarks of Reynolds Presto Products Inc.

Greenfix Soil Stabilisation & Erosion Control Limited
Old Manor Farm Yard,
Beckford Road
Ashton under Hill,
Evesham
Worcestershire
WR11 7SU

Tel 01608 666027



GEOSYSTEMS

PRESTO GEOSYSTEMS®

670 N PERKINS STREET, APPLETON, WISCONSIN, USA 54914

Ph: 920-738-1328 or 800-548-3424 ■ Fax: 920-738-1222

E-mail: INFO@PRESTOGEO.COM WWW.PRESTOGEO.COM/

GWSL000-3 1-SEPT-2013